

COMMERCIAL CATALOGUE
2013-2014

WE CARE WHAT YOU THINK

Arte^luce
LED LIGHTING SOLUTIONS

INCORPORATED IN NEW DELHI, INDIA, 'ARTELUCE', IS ONE OF THE LEADING NAMES ENGAGED IN MANUFACTURING, EXPORTING AND SUPPLYING A SUPERIOR QUALITY RANGE OF LED LIGHTS AND DRIVERS. WE ARTELUCE TAKE IMMENSE PLEASURE IN INTRODUCING OURSELVES AS ONE OF THE DISTINGUISHED MANUFACTURER, EXPORTER AND SUPPLIER OF LED INDUSTRIAL LIGHTS, LED LINEAR LIGHTS, LED RETRO TUBE LIGHTS, LED RECESSED / SURFACE CEILING LIGHTS, LED PANEL LIGHTS, LED DOWN LIGHTS, LED LANDSCAPE LIGHTS, LED STREET LIGHTS, LED FLOOD LIGHT, LED TRACK LIGHT, LED SOLAR STREET LIGHTS.

ALL THESE PRODUCTS ARE KNOWN FOR THEIR LOW POWER CONSUMPTION, EXCELLENT FUNCTIONALITY, ENVIRONMENT FRIENDLINESS AND LONG WORKING LIFE. OUR MAIN CAPABILITY AND SPECIALIZATION IS THAT WE CAN SUPPLY QUALITY AND CUSTOMISED SERIES AT MINIMAL COST. WE FOLLOW FAIR AND HONEST BUSINESS PRACTICES IN ALL OF OUR DEALINGS, WHICH ENHANCE THE RELATIONSHIP BETWEEN US AND THE CLIENTS.

OUR COMPANY HAS ACHIEVED TREMENDOUS SUCCESS BY INCORPORATING STATE-OF-THE-ART TECHNOLOGY ALONG WITH TECHNICAL EXCELLENCE. WE HAVE A STATE-OF-THE-ART MANUFACTURING PLANT, FACILITATED WITH ADVANCED MACHINERIES AND TOOLS. OUR MANUFACTURING PLANT IS WELL SEGREGATED IN VARIOUS DEPARTMENTS, WHICH ALLOW US TO MANUFACTURE OUR RANGE OF PRODUCTS IN ACCORDANCE TO THE NORMS AND STANDARDS OF THE INDUSTRY. ALL THE DEPARTMENTS WORK IN CLOSE CO-ORDINATION WITH EACH OTHER TO UNDERSTAND THE EXACT REQUIREMENTS OF CLIENTS AND DELIVER THEM PRECISELY ENGINEERED RANGE OF PRODUCTS WITHIN STIPULATED TIME FRAME.

INDEX



BRIGHT DOWN LIGHT



REFLECTO BRIGHT DOWN LIGHT



ALMO FLATO DOWN LIGHT



ROUND PANEL LIGHT



REFLECTO BRIGHT DOWN LIGHT



DEPO DOWN LIGHT



COB LIGHT ECO



REFLECTO BRIGHT DOWN LIGHT



HIGH DEEP DOWN LIGHT



REFLECTO BRIGHT DOWN LIGHT



PANEL LIGHT



SQUARE DOWN LIGHT



SQUARE DOWN LIGHT




SQUARE DOWN LIGHT



REFLECTO BRIGHT DOWN LIGHT



BACKLIT PANEL



REFLECTO BRIGHT DOWN LIGHT



ALMO FLATO DOWN LIGHT



DOWN LIGHT LENSO




LENZO DEEP DOWN LIGHT



SURFACE MOUNTED DOWN LIGHT



REFLECTO BRIGHT DOWN LIGHT



LINEAR LIGHT



REFLECTO BRIGHT DOWN LIGHT



REFLECTO BRIGHT DOWN LIGHT



UNDERWATER LIGHT



GROUND BURIAL LIGHT



REFLECTO BRIGHT DOWN LIGHT



HIGHWAY LIGHT



FOUNTAIN LIGHT



REFLECTO BRIGHT DOWN LIGHT

BRIGHT DOWN LIGHT



Features : High intensity LED module. material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------



ATCL201153	2700	7.2 W	358 LM	80R	20	40,000 Hr
ATCL301153	3000	7.2 W	367 LM	80R	20	40,000 Hr
ATCL401153	4200	7.2 W	394 LM	80R	20	40,000 Hr
ATCL501153	5000	7.2 W	412 LM	80R	20	40,000 Hr
ATCL601153	6500	7.2 W	448 LM	80R	20	40,000 Hr



ATCL201154	2700	11.8 W	587 LM	80R	20	40,000 Hr
ATCL301154	3000	11.8 W	602 LM	80R	20	40,000 Hr
ATCL401154	4200	11.8 W	646 LM	80R	20	40,000 Hr
ATCL501154	5000	11.8 W	675 LM	80R	20	40,000 Hr
ATCL601154	6500	11.8 W	734 LM	80R	20	40,000 Hr



ATCL201155	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301155	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401155	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501155	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601155	6500	14.4 W	896 LM	80R	20	40,000 Hr



ATCL201156	2700	20.2 W	1005 LM	80R	20	40,000 Hr
ATCL301156	3000	20.2 W	1030 LM	80R	20	40,000 Hr
ATCL401156	4200	20.2 W	1106 LM	80R	20	40,000 Hr
ATCL501156	5000	20.2 W	1156 LM	80R	20	40,000 Hr
ATCL601156	6500	20.2 W	1256 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for triac dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

REFLECTO BRIGHT DOWN LIGHT



Features : High intensity LED module.
material of Aluminium Die casting former,
larger cooling area and Better heat
dissipation body.
With high glossy reflector in front.
This technology makes point light
sources, increasing the luminous surface,
the translucent panel adopt polycarbonate
material.

Applications : Offices, Conference
rooms, Corridor staircase, Recreation
area, Departmental store, Sport hall,
Boutique and hospitals.



Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201159	2700	7.2 W	363 LM	80R	20	40,000 Hr
ATCL301159	3000	7.2 W	372 LM	80R	20	40,000 Hr
ATCL401159	4200	7.2 W	399 LM	80R	20	40,000 Hr
ATCL501159	5000	7.2 W	417 LM	80R	20	40,000 Hr
ATCL601159	6500	7.2 W	454 LM	80R	20	40,000 Hr
ATCL201160	2700	11.8 W	587 LM	80R	20	40,000 Hr
ATCL301160	3000	11.8 W	602 LM	80R	20	40,000 Hr
ATCL401160	4200	11.8 W	646 LM	80R	20	40,000 Hr
ATCL501160	5000	11.8 W	675 LM	80R	20	40,000 Hr
ATCL601160	6500	11.8 W	734 LM	80R	20	40,000 Hr
ATCL201161	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301161	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401161	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501161	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601161	6500	14.4 W	896 LM	80R	20	40,000 Hr
ATCL201162	2700	20.2 W	1005 LM	80R	20	40,000 Hr
ATCL301162	3000	20.2 W	1030 LM	80R	20	40,000 Hr
ATCL401162	4200	20.2 W	1106 LM	80R	20	40,000 Hr
ATCL501162	5000	20.2 W	1156 LM	80R	20	40,000 Hr
ATCL601162	6500	20.2 W	1256 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.







ALMO FLATO DOWN LIGHT



Features : High intensity LED module. material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan	
	ATCL201167	2700	9.1 W	453 LM	80R	20	40,000 Hr
	ATCL301167	3000	9.1 W	464 LM	80R	20	40,000 Hr
	ATCL401167	4200	9.1 W	498 LM	80R	20	40,000 Hr
	ATCL501167	5000	9.1 W	521 LM	80R	20	40,000 Hr
	ATCL601167	6500	9.1 W	566 LM	80R	20	40,000 Hr
	ATCL201168	2700	14.4 W	717 LM	80R	20	40,000 Hr
	ATCL301168	3000	14.4 W	734 LM	80R	20	40,000 Hr
	ATCL401168	4200	14.4 W	788 LM	80R	20	40,000 Hr
	ATCL501168	5000	14.4 W	824 LM	80R	20	40,000 Hr
	ATCL601168	6500	14.4 W	896 LM	80R	20	40,000 Hr
	ATCL201169	2700	20.2 W	1005 LM	80R	20	40,000 Hr
	ATCL301169	3000	20.2 W	1030 LM	80R	20	40,000 Hr
	ATCL401169	4200	20.2 W	1106 LM	80R	20	40,000 Hr
	ATCL501169	5000	20.2 W	1156 LM	80R	20	40,000 Hr
	ATCL601169	6500	20.2 W	1256 LM	80R	20	40,000 Hr
	ATCL201171	2700	26.7 W	1329 LM	80R	20	40,000 Hr
	ATCL301171	3000	26.7 W	1362 LM	80R	20	40,000 Hr
	ATCL401171	4200	26.7 W	1461 LM	80R	20	40,000 Hr
	ATCL501171	5000	26.7 W	1528 LM	80R	20	40,000 Hr
	ATCL601171	6500	26.7 W	1661 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.


'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.


High CRI fixture also available.

Colour temp of 2400K is also available on request.


Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------



ATCL201172	2700	9.1 W	453 LM	80R	20	40,000 Hr
ATCL301172	3000	9.1 W	464 LM	80R	20	40,000 Hr
ATCL401172	4200	9.1 W	498 LM	80R	20	40,000 Hr
ATCL501172	5000	9.1 W	521 LM	80R	20	40,000 Hr
ATCL601172	6500	9.1 W	566 LM	80R	20	40,000 Hr



ATCL201173	2700	12.4 W	617 LM	80R	20	40,000 Hr
ATCL301173	3000	12.4 W	632 LM	80R	20	40,000 Hr
ATCL401173	4200	12.4 W	679 LM	80R	20	40,000 Hr
ATCL501173	5000	12.4 W	710 LM	80R	20	40,000 Hr
ATCL601173	6500	12.4 W	771 LM	80R	20	40,000 Hr




ATCL201174	2700	20.4 W	1015 LM	80R	20	40,000 Hr
ATCL301174	3000	20.4 W	1040 LM	80R	20	40,000 Hr
ATCL401174	4200	20.4 W	1117 LM	80R	20	40,000 Hr
ATCL501174	5000	20.4 W	1167 LM	80R	20	40,000 Hr
ATCL601174	6500	20.4 W	1269 LM	80R	20	40,000 Hr

ALMO FLATO DOWN LIGHT



Features : High intensity LED module, material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



ATCL201175	2700	26.4 W	1314 LM	80R	20	40,000 Hr
ATCL301175	3000	26.4 W	1347 LM	80R	20	40,000 Hr
ATCL401175	4200	26.4 W	1445 LM	80R	20	40,000 Hr
ATCL501175	5000	26.4 W	1511 LM	80R	20	40,000 Hr
ATCL601175	6500	26.4 W	1642 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------



ATCL201189	2700	5.4 W	269 LM	80R	20	40,000 Hr
ATCL301189	3000	5.4 W	275 LM	80R	20	40,000 Hr
ATCL401189	4200	5.4 W	296 LM	80R	20	40,000 Hr
ATCL501189	5000	5.4 W	309 LM	80R	20	40,000 Hr
ATCL601189	6500	5.4 W	336 LM	80R	20	40,000 Hr



ATCL201190	2700	7.4 W	368 LM	80R	20	40,000 Hr
ATCL301190	3000	7.4 W	377 LM	80R	20	40,000 Hr
ATCL401190	4200	7.4 W	405 LM	80R	20	40,000 Hr
ATCL501190	5000	7.4 W	423 LM	80R	20	40,000 Hr
ATCL601190	6500	7.4 W	460 LM	80R	20	40,000 Hr



ATCL201191	2700	9.4 W	468 LM	80R	20	40,000 Hr
ATCL301191	3000	9.4 W	479 LM	80R	20	40,000 Hr
ATCL401191	4200	9.4 W	515 LM	80R	20	40,000 Hr
ATCL501191	5000	9.4 W	538 LM	80R	20	40,000 Hr
ATCL601191	6500	9.4 W	585 LM	80R	20	40,000 Hr



POLY FLATO LIGHT



Features : High intensity LED module, with polycarbonate frame and with polycarbonate in front of the PC body. Deep recessed heat sink is provided for the better thermal management.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



ATCL201192	2700	11.4 W	567 LM	80R	20	40,000 Hr
ATCL301192	3000	11.4 W	581 LM	80R	20	40,000 Hr
ATCL401192	4200	11.4 W	624 LM	80R	20	40,000 Hr
ATCL501192	5000	11.4 W	652 LM	80R	20	40,000 Hr
ATCL601192	6500	11.4 W	709 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

DEPO DOWN LIGHT



Features : High intensity LED module. material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201180	2700	7.2 W	358 LM	80R	20	40,000 Hr
ATCL301180	3000	7.2 W	367 LM	80R	20	40,000 Hr
ATCL401180	4200	7.2 W	394 LM	80R	20	40,000 Hr
ATCL501180	5000	7.2 W	412 LM	80R	20	40,000 Hr
ATCL601180	6500	7.2 W	448 LM	80R	20	40,000 Hr
ATCL201181	2700	9.4 W	468 LM	80R	20	40,000 Hr
ATCL301181	3000	9.4 W	479 LM	80R	20	40,000 Hr
ATCL401181	4200	9.4 W	515 LM	80R	20	40,000 Hr
ATCL501181	5000	9.4 W	538 LM	80R	20	40,000 Hr
ATCL601181	6500	9.4 W	585 LM	80R	20	40,000 Hr
ATCL201182	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301182	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401182	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501182	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601182	6500	14.4 W	896 LM	80R	20	40,000 Hr
ATCL201183	2700	20.4 W	1015 LM	80R	20	40,000 Hr
ATCL301183	3000	20.4 W	1040 LM	80R	20	40,000 Hr
ATCL401183	4200	20.4 W	1117 LM	80R	20	40,000 Hr
ATCL501183	5000	20.4 W	1167 LM	80R	20	40,000 Hr
ATCL601183	6500	20.4 W	1269 LM	80R	20	40,000 Hr
ATCL201184	2700	24.4 W	1214 LM	80R	20	40,000 Hr
ATCL301184	3000	24.4 W	1244 LM	80R	20	40,000 Hr
ATCL401184	4200	24.4 W	1336 LM	80R	20	40,000 Hr
ATCL501184	5000	24.4 W	1396 LM	80R	20	40,000 Hr
ATCL601184	6500	24.4 W	1518 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.



COB LIGHT ECO



Features : High intensity LED module, material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, The technology of point source is C.O.B Which is adopted in this fixture.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201166	2700	26.4 W	1314 LM	80R	20	40,000 Hr
ATCL301166	3000	26.4 W	1347 LM	80R	20	40,000 Hr
ATCL401166	4200	26.4 W	1445 LM	80R	20	40,000 Hr
ATCL501166	5000	26.4 W	1511 LM	80R	20	40,000 Hr
ATCL601166	6500	26.4 W	1642 LM	80R	20	40,000 Hr
ATCL201164	2700	9.1 W	453 LM	80R	20	40,000 Hr
ATCL301164	3000	9.1 W	464 LM	80R	20	40,000 Hr
ATCL401164	4200	9.1 W	498 LM	80R	20	40,000 Hr
ATCL501164	5000	9.1 W	521 LM	80R	20	40,000 Hr
ATCL601164	6500	9.1 W	566 LM	80R	20	40,000 Hr
ATCL201165	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301165	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401165	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501165	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601165	6500	14.4 W	896 LM	80R	20	40,000 Hr
ATCL201267	2700	7.4 W	368 LM	80R	20	40,000 Hr
ATCL301267	3000	7.4 W	377 LM	80R	20	40,000 Hr
ATCL401267	4200	7.4 W	405 LM	80R	20	40,000 Hr
ATCL501267	5000	7.4 W	423 LM	80R	20	40,000 Hr
ATCL601267	6500	7.4 W	460 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201229	2700	9.4 W	468 LM	80R	20	40,000 Hr
ATCL301229	3000	9.4 W	479 LM	80R	20	40,000 Hr
ATCL401229	4200	9.4 W	515 LM	80R	20	40,000 Hr
ATCL501229	5000	9.4 W	538 LM	80R	20	40,000 Hr
ATCL601229	6500	9.4 W	585 LM	80R	20	40,000 Hr



ATCL201230	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301230	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401230	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501230	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601230	6500	14.4 W	896 LM	80R	20	40,000 Hr



ATCL201231	2700	20.4 W	1015 LM	80R	20	40,000 Hr
ATCL301231	3000	20.4 W	1040 LM	80R	20	40,000 Hr
ATCL401231	4200	20.4 W	1117 LM	80R	20	40,000 Hr
ATCL501231	5000	20.4 W	1167 LM	80R	20	40,000 Hr
ATCL601231	6500	20.4 W	1269 LM	80R	20	40,000 Hr



HIGH DEEP DOWN LIGHT



Features : High intensity LED module. material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material, With deep down light.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



ATCL201259	2700	9.4 W	468 LM	80R	20	40,000 Hr
ATCL301259	3000	9.4 W	479 LM	80R	20	40,000 Hr
ATCL401259	4200	9.4 W	515 LM	80R	20	40,000 Hr
ATCL501259	5000	9.4 W	538 LM	80R	20	40,000 Hr
ATCL601259	6500	9.4 W	585 LM	80R	20	40,000 Hr



Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201260	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301260	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401260	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501260	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601260	6500	14.4 W	896 LM	80R	20	40,000 Hr



ATCL201261	2700	20.4 W	1015 LM	80R	20	40,000 Hr
ATCL301261	3000	20.4 W	1040 LM	80R	20	40,000 Hr
ATCL401261	4200	20.4 W	1117 LM	80R	20	40,000 Hr
ATCL501261	5000	20.4 W	1167 LM	80R	20	40,000 Hr
ATCL601261	6500	20.4 W	1269 LM	80R	20	40,000 Hr



ATCL201262	2700	9.4 W	468 LM	80R	20	40,000 Hr
ATCL301262	3000	9.4 W	479 LM	80R	20	40,000 Hr
ATCL401262	4200	9.4 W	515 LM	80R	20	40,000 Hr
ATCL501262	5000	9.4 W	538 LM	80R	20	40,000 Hr
ATCL601262	6500	9.4 W	585 LM	80R	20	40,000 Hr



LENZO DEEP DOWN LIGHT



Features : High intensity LED module, material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

ATCL201263	2700	20.4 W	1015 LM	80R	20	40,000 Hr
ATCL301263	3000	20.4 W	1040 LM	80R	20	40,000 Hr
ATCL401263	4200	20.4 W	1117 LM	80R	20	40,000 Hr
ATCL501263	5000	20.4 W	1167 LM	80R	20	40,000 Hr
ATCL601263	6500	20.4 W	1269 LM	80R	20	40,000 Hr



Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

PANEL LIGHT



Features : High intensity LED module. material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201198	2700	11.4 W	567 LM	80R	20	40,000 Hr
ATCL301198	3000	11.4 W	581 LM	80R	20	40,000 Hr
ATCL401198	4200	11.4 W	624 LM	80R	20	40,000 Hr
ATCL501198	5000	11.4 W	652 LM	80R	20	40,000 Hr
ATCL601198	6500	11.4 W	709 LM	80R	20	40,000 Hr
ATCL201199	2700	17.4 W	866 LM	80R	20	40,000 Hr
ATCL301199	3000	17.4 W	887 LM	80R	20	40,000 Hr
ATCL401199	4200	17.4 W	952 LM	80R	20	40,000 Hr
ATCL501199	5000	17.4 W	996 LM	80R	20	40,000 Hr
ATCL601199	6500	17.4 W	1082 LM	80R	20	40,000 Hr
ATCL201200	2700	24.4 W	1214 LM	80R	20	40,000 Hr
ATCL301200	3000	24.4 W	1244 LM	80R	20	40,000 Hr
ATCL401200	4200	24.4 W	1336 LM	80R	20	40,000 Hr
ATCL501200	5000	24.4 W	1396 LM	80R	20	40,000 Hr
ATCL601200	6500	24.4 W	1518 LM	80R	20	40,000 Hr
ATCL201199	2700	17.4 W	866 LM	80R	20	40,000 Hr
ATCL301199	3000	17.4 W	887 LM	80R	20	40,000 Hr
ATCL401199	4200	17.4 W	952 LM	80R	20	40,000 Hr
ATCL501199	5000	17.4 W	996 LM	80R	20	40,000 Hr
ATCL601199	6500	17.4 W	1082 LM	80R	20	40,000 Hr
ATCL201200	2700	24.4 W	1214 LM	80R	20	40,000 Hr
ATCL301200	3000	24.4 W	1244 LM	80R	20	40,000 Hr
ATCL401200	4200	24.4 W	1336 LM	80R	20	40,000 Hr
ATCL501200	5000	24.4 W	1396 LM	80R	20	40,000 Hr
ATCL601200	6500	24.4 W	1518 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.



SQUARE DOWN LIGHT



Features : High intensity LED module. material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material. The picture is available in the square shape.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201176	2700	6.4 W	318 LM	80R	20	40,000 Hr
ATCL301176	3000	6.4 W	326 LM	80R	20	40,000 Hr
ATCL401176	4200	6.4 W	350 LM	80R	20	40,000 Hr
ATCL501176	5000	6.4 W	366 LM	80R	20	40,000 Hr
ATCL601176	6500	6.4 W	398 LM	80R	20	40,000 Hr
ATCL201177	2700	11.4 W	567 LM	80R	20	40,000 Hr
ATCL301177	3000	11.4 W	581 LM	80R	20	40,000 Hr
ATCL401177	4200	11.4 W	624 LM	80R	20	40,000 Hr
ATCL501177	5000	11.4 W	652 LM	80R	20	40,000 Hr
ATCL601177	6500	11.4 W	709 LM	80R	20	40,000 Hr
ATCL201178	2700	18.4 W	916 LM	80R	20	40,000 Hr
ATCL301178	3000	18.4 W	938 LM	80R	20	40,000 Hr
ATCL401178	4200	18.4 W	1007 LM	80R	20	40,000 Hr
ATCL501178	5000	18.4 W	1053 LM	80R	20	40,000 Hr
ATCL601178	6500	18.4 W	1144 LM	80R	20	40,000 Hr
ATCL201179	2700	27.4 W	1363 LM	80R	20	40,000 Hr
ATCL301179	3000	27.4 W	1398 LM	80R	20	40,000 Hr
ATCL401179	4200	27.4 W	1500 LM	80R	20	40,000 Hr
ATCL501179	5000	27.4 W	1568 LM	80R	20	40,000 Hr
ATCL601179	6500	27.4 W	1704 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

DOWN LIGHT ECO



Features : High intensity LED module. material of Aluminium Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material. This is available in the square format.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201193	2700	11.4 W	567 LM	80R	20	40,000 Hr
ATCL301193	3000	11.4 W	581 LM	80R	20	40,000 Hr
ATCL401193	4200	11.4 W	624 LM	80R	20	40,000 Hr
ATCL501193	5000	11.4 W	652 LM	80R	20	40,000 Hr
ATCL601193	6500	11.4 W	709 LM	80R	20	40,000 Hr
ATCL201194	2700	7.4 W	368 LM	80R	20	40,000 Hr
ATCL301194	3000	7.4 W	377 LM	80R	20	40,000 Hr
ATCL401194	4200	7.4 W	405 LM	80R	20	40,000 Hr
ATCL501194	5000	7.4 W	423 LM	80R	20	40,000 Hr
ATCL601194	6500	7.4 W	460 LM	80R	20	40,000 Hr
ATCL201195	2700	17.4 W	866 LM	80R	20	40,000 Hr
ATCL301195	3000	17.4 W	887 LM	80R	20	40,000 Hr
ATCL401195	4200	17.4 W	952 LM	80R	20	40,000 Hr
ATCL501195	5000	17.4 W	996 LM	80R	20	40,000 Hr
ATCL601195	6500	17.4 W	1082 LM	80R	20	40,000 Hr
ATCL201196	2700	23.4 W	1164 LM	80R	20	40,000 Hr
ATCL301196	3000	23.4 W	1193 LM	80R	20	40,000 Hr
ATCL401196	4200	23.4 W	1281 LM	80R	20	40,000 Hr
ATCL501196	5000	23.4 W	1339 LM	80R	20	40,000 Hr
ATCL601196	6500	23.4 W	1455 LM	80R	20	40,000 Hr

Above LED fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :


'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

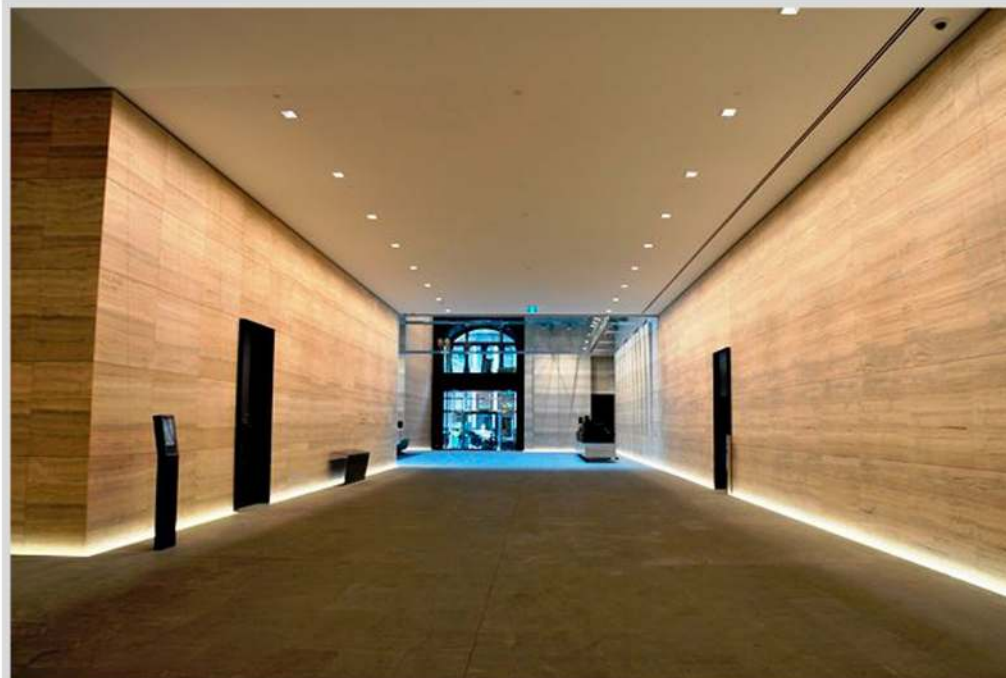

BACKLIT PANEL



Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201236	2700	11.4 W	567 LM	80R	65	40,000 Hr
ATCL301236	3000	11.4 W	581 LM	80R	65	40,000 Hr
ATCL401236	4200	11.4 W	624 LM	80R	65	40,000 Hr
ATCL501236	5000	11.4 W	652 LM	80R	65	40,000 Hr
ATCL601236	6500	11.4 W	709 LM	80R	65	40,000 Hr
ATCL201237	2700	17.4 W	866 LM	80R	65	40,000 Hr
ATCL301237	3000	17.4 W	887 LM	80R	65	40,000 Hr
ATCL401237	4200	17.4 W	952 LM	80R	65	40,000 Hr
ATCL501237	5000	17.4 W	996 LM	80R	65	40,000 Hr
ATCL601237	6500	17.4 W	1082 LM	80R	65	40,000 Hr
ATCL201238	2700	24.4 W	1214 LM	80R	65	40,000 Hr
ATCL301238	3000	24.4 W	1244 LM	80R	65	40,000 Hr
ATCL401238	4200	24.4 W	1336 LM	80R	65	40,000 Hr
ATCL501238	5000	24.4 W	1396 LM	80R	65	40,000 Hr
ATCL601238	6500	24.4 W	1518 LM	80R	65	40,000 Hr
ATCL201271	2700	9.4 W	468 LM	80R	20	40,000 Hr
ATCL301271	3000	9.4 W	479 LM	80R	20	40,000 Hr
ATCL401271	4200	9.4 W	515 LM	80R	20	40,000 Hr
ATCL501271	5000	9.4 W	538 LM	80R	20	40,000 Hr
ATCL601271	6500	9.4 W	585 LM	80R	20	40,000 Hr
ATCL201272	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301272	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401272	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501272	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601272	6500	14.4 W	896 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :


'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.


Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available


Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------



ATCL201172	2700	9.1 W	453 LM	80R	20	40,000 Hr
ATCL301172	3000	9.1 W	464 LM	80R	20	40,000 Hr
ATCL401172	4200	9.1 W	498 LM	80R	20	40,000 Hr
ATCL501172	5000	9.1 W	521 LM	80R	20	40,000 Hr
ATCL601172	6500	9.1 W	566 LM	80R	20	40,000 Hr



ATCL201173	2700	12.4 W	617 LM	80R	20	40,000 Hr
ATCL301173	3000	12.4 W	632 LM	80R	20	40,000 Hr
ATCL401173	4200	12.4 W	679 LM	80R	20	40,000 Hr
ATCL501173	5000	12.4 W	710 LM	80R	20	40,000 Hr
ATCL601173	6500	12.4 W	771 LM	80R	20	40,000 Hr




ATCL201174	2700	20.4 W	1015 LM	80R	20	40,000 Hr
ATCL301174	3000	20.4 W	1040 LM	80R	20	40,000 Hr
ATCL401174	4200	20.4 W	1117 LM	80R	20	40,000 Hr
ATCL501174	5000	20.4 W	1167 LM	80R	20	40,000 Hr
ATCL601174	6500	20.4 W	1269 LM	80R	20	40,000 Hr

ALMO FLATO DOWN LIGHT



Features : High intensity LED module, material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



ATCL201175	2700	26.4 W		80R	20	40,000 Hr
ATCL301175	3000	26.4 W		80R	20	40,000 Hr
ATCL401175	4200	26.4 W		80R	20	40,000 Hr
ATCL501175	5000	26.4 W		80R	20	40,000 Hr
ATCL601175	6500	26.4 W		80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.


Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201232	2700	8.4 W	418 LM	80R	20	40,000 Hr
ATCL301232	3000	8.4 W	428 LM	80R	20	40,000 Hr
ATCL401232	4200	8.4 W	460 LM	80R	20	40,000 Hr
ATCL501232	5000	8.4 W	481 LM	80R	20	40,000 Hr
ATCL601232	6500	8.4 W	522 LM	80R	20	40,000 Hr



ATCL201233	2700	11.4 W	567 LM	80R	20	40,000 Hr
ATCL301233	3000	11.4 W	581 LM	80R	20	40,000 Hr
ATCL401233	4200	11.4 W	624 LM	80R	20	40,000 Hr
ATCL501233	5000	11.4 W	652 LM	80R	20	40,000 Hr
ATCL601233	6500	11.4 W	709 LM	80R	20	40,000 Hr



ATCL201234	2700	14.4 W	717 LM	80R	20	40,000 Hr
ATCL301234	3000	14.4 W	734 LM	80R	20	40,000 Hr
ATCL401234	4200	14.4 W	788 LM	80R	20	40,000 Hr
ATCL501234	5000	14.4 W	824 LM	80R	20	40,000 Hr
ATCL601234	6500	14.4 W	896 LM	80R	20	40,000 Hr



ROUND PANEL LIGHT



Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

ATCL201235	2700	20.4 W	1015 LM	80R	20	40,000 Hr
ATCL301235	3000	20.4 W	1040 LM	80R	20	40,000 Hr
ATCL401235	4200	20.4 W	1117 LM	80R	20	40,000 Hr
ATCL501235	5000	20.4 W	1167 LM	80R	20	40,000 Hr
ATCL601235	6500	20.4 W	1269 LM	80R	20	40,000 Hr



Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available


Colour temp of 2400K is also available on request.

DOWN LIGHT LENS



Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material. Available in Different Beam angle.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

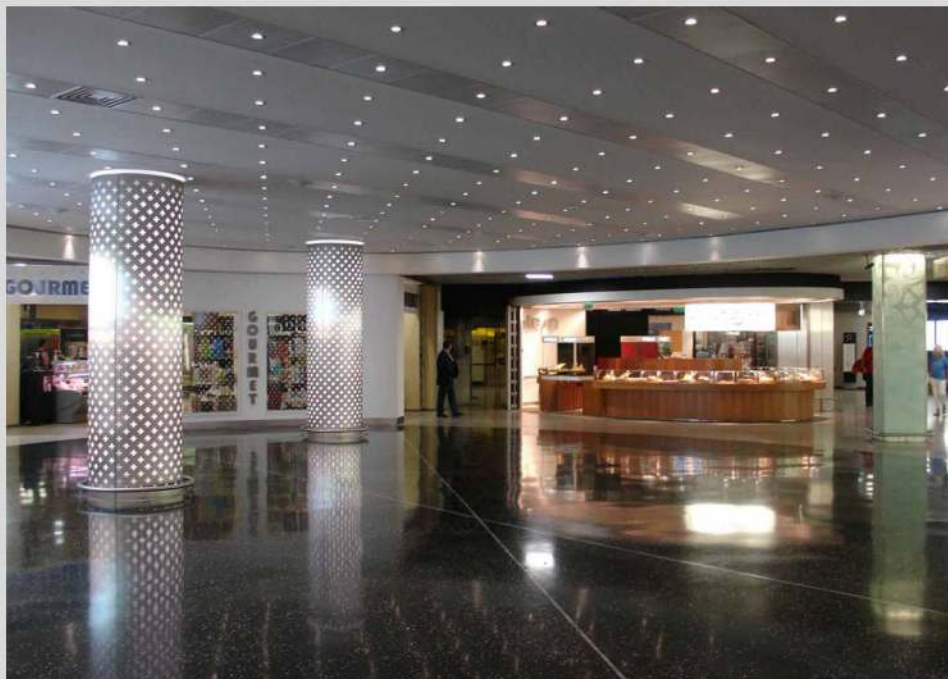

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------



ATCL201185	2700	5.4 W	269 LM	80R	20	40,000 Hr
ATCL301185	3000	5.4 W	275 LM	80R	20	40,000 Hr
ATCL401185	4200	5.4 W	296 LM	80R	20	40,000 Hr
ATCL501185	5000	5.4 W	309 LM	80R	20	40,000 Hr
ATCL601185	6500	5.4 W	336 LM	80R	20	40,000 Hr



ATCL201186	2700	7.4 W	368 LM	80R	20	40,000 Hr
ATCL301186	3000	7.4 W	377 LM	80R	20	40,000 Hr
ATCL401186	4200	7.4 W	405 LM	80R	20	40,000 Hr
ATCL501186	5000	7.4 W	423 LM	80R	20	40,000 Hr
ATCL601186	6500	7.4 W	460 LM	80R	20	40,000 Hr



ATCL201187	2700	9.4 W	468 LM	80R	20	40,000 Hr
ATCL301187	3000	9.4 W	479 LM	80R	20	40,000 Hr
ATCL401187	4200	9.4 W	515 LM	80R	20	40,000 Hr
ATCL501187	5000	9.4 W	538 LM	80R	20	40,000 Hr
ATCL601187	6500	9.4 W	585 LM	80R	20	40,000 Hr



ATCL201188	2700	11.4 W	567 LM	80R	20	40,000 Hr
ATCL301188	3000	11.4 W	581 LM	80R	20	40,000 Hr
ATCL401188	4200	11.4 W	624 LM	80R	20	40,000 Hr
ATCL501188	5000	11.4 W	652 LM	80R	20	40,000 Hr
ATCL601188	6500	11.4 W	709 LM	80R	20	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available

Colour temp of 2400K is also available on request.



SURFACE MOUNTED DOWN LIGHT



Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------



ATCL201264	2700	5.4 W	269 LM	80R	54	40,000 Hr
ATCL301264	3000	5.4 W	275 LM	80R	54	40,000 Hr
ATCL401264	4200	5.4 W	296 LM	80R	54	40,000 Hr
ATCL501264	5000	5.4 W	309 LM	80R	54	40,000 Hr
ATCL601264	6500	5.4 W	336 LM	80R	54	40,000 Hr



ATCL201265	2700	9.4 W	468 LM	80R	54	40,000 Hr
ATCL301265	3000	9.4 W	479 LM	80R	54	40,000 Hr
ATCL401265	4200	9.4 W	515 LM	80R	54	40,000 Hr
ATCL501265	5000	9.4 W	538 LM	80R	54	40,000 Hr
ATCL601265	6500	9.4 W	585 LM	80R	54	40,000 Hr



ATCL201266	2700	14.4 W	717 LM	80R	54	40,000 Hr
ATCL301266	3000	14.4 W	734 LM	80R	54	40,000 Hr
ATCL401266	4200	14.4 W	788 LM	80R	54	40,000 Hr
ATCL501266	5000	14.4 W	824 LM	80R	54	40,000 Hr
ATCL601266	6500	14.4 W	896 LM	80R	54	40,000 Hr



ATCL201204				80R	67	40,000 Hr
ATCL301204				80R	67	40,000 Hr
ATCL401204				80R	67	40,000 Hr
ATCL501204				80R	67	40,000 Hr
ATCL601204				80R	67	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201254	2700			80R	65	40,000 Hr
ATCL301254	3000			80R	65	40,000 Hr
ATCL401254	4200			80R	65	40,000 Hr
ATCL501254	5000			80R	65	40,000 Hr
ATCL601254	6500			80R	65	40,000 Hr



ATCL201255	2700			80R	65	40,000 Hr
ATCL301255	3000			80R	65	40,000 Hr
ATCL401255	4200			80R	65	40,000 Hr
ATCL501255	5000			80R	65	40,000 Hr
ATCL601255	6500			80R	65	40,000 Hr



LINEAR LIGHT




Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



ATCL201257	2700			80R	20	40,000 Hr
ATCL301257	3000			80R	20	40,000 Hr
ATCL401257	4200			80R	20	40,000 Hr
ATCL501257	5000			80R	20	40,000 Hr
ATCL601257	6500			80R	20	40,000 Hr



ATCL201258	2700			80R	20	40,000 Hr
ATCL301258	3000			80R	20	40,000 Hr
ATCL401258	4200			80R	20	40,000 Hr
ATCL501258	5000			80R	20	40,000 Hr
ATCL601258	6500			80R	20	40,000 Hr



ATCL201203				80R	67	40,000 Hr
ATCL301203				80R	67	40,000 Hr
ATCL401203				80R	67	40,000 Hr
ATCL501203				80R	67	40,000 Hr
ATCL601203				80R	67	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available.

Colour temp of 2400K is also available on request.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------




ATCL201213	2700		448	80R	60	40,000 Hr
ATCL301213	3000		459	80R	60	40,000 Hr
ATCL401213	4200		493	80R	60	40,000 Hr
ATCL501213	5000		515	80R	60	40,000 Hr
ATCL601213	6500		560	80R	60	40,000 Hr



ATCL201214	2700		585	80R	60	40,000 Hr
ATCL301214	3000		600	80R	60	40,000 Hr
ATCL401214	4200		644	80R	60	40,000 Hr
ATCL501214	5000		673	80R	60	40,000 Hr
ATCL601214	6500		731	80R	60	40,000 Hr



UNDERWATER LIGHT



Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



ATCL201205				80R	65	40,000 Hr
ATCL301205				80R	65	40,000 Hr
ATCL401205				80R	65	40,000 Hr
ATCL501205				80R	65	40,000 Hr
ATCL601205				80R	65	40,000 Hr



ATCL201206				80R	65	40,000 Hr
ATCL301206				80R	65	40,000 Hr
ATCL401206				80R	65	40,000 Hr
ATCL501206				80R	65	40,000 Hr
ATCL601206				80R	65	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available

Colour temp of 2400K is also available on request.

GROUND BURIAL



Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
ATCL201208				80R	65	40,000 Hr
ATCL301208				80R	65	40,000 Hr
ATCL401208				80R	65	40,000 Hr
ATCL501208				80R	65	40,000 Hr
ATCL601208				80R	65	40,000 Hr
ATCL201209	2700	20.2 W	1005 LM	80R	65	40,000 Hr
ATCL301209	3000	20.2 W	1030 LM	80R	65	40,000 Hr
ATCL401209	4200	20.2 W	1106 LM	80R	65	40,000 Hr
ATCL501209	5000	20.2 W	1156 LM	80R	65	40,000 Hr
ATCL601209	6500	20.2 W	1256 LM	80R	65	40,000 Hr
ATCL201210	2700	20.2 W	1005 LM	80R	65	40,000 Hr
ATCL301210	3000	20.2 W	1030 LM	80R	65	40,000 Hr
ATCL401210	4200	20.2 W	1106 LM	80R	65	40,000 Hr
ATCL501210	5000	20.2 W	1156 LM	80R	65	40,000 Hr
ATCL601210	6500	20.2 W	1256 LM	80R	65	40,000 Hr
ATCL201211	2700			80R	65	40,000 Hr
ATCL301211	3000			80R	65	40,000 Hr
ATCL401211	4200			80R	65	40,000 Hr
ATCL501211	5000			80R	65	40,000 Hr
ATCL601211	6500			80R	65	40,000 Hr
ATCL201212	2700			80R	65	40,000 Hr
ATCL301212	3000			80R	65	40,000 Hr
ATCL401212	4200			80R	65	40,000 Hr
ATCL501212	5000			80R	65	40,000 Hr
ATCL601212	6500			80R	65	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.


Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available

Colour temp of 2400K is also available on request.



HIGHWAY LIGHT



Features : High intensity LED module, material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
	ATCL201215	2700		80R	40	40,000 Hr
	ATCL301215	3000		80R	40	40,000 Hr
	ATCL401215	4200		80R	40	40,000 Hr
	ATCL501215	5000		80R	40	40,000 Hr
	ATCL601215	6500		80R	40	40,000 Hr
	ATCL201216	2700		80R	40	40,000 Hr
	ATCL301216	3000		80R	40	40,000 Hr
	ATCL401216	4200		80R	40	40,000 Hr
	ATCL501216	5000		80R	40	40,000 Hr
	ATCL601216	6500		80R	40	40,000 Hr
	ATCL201222	2700		80R	40	40,000 Hr
	ATCL301222	3000		80R	40	40,000 Hr
	ATCL401222	4200		80R	40	40,000 Hr
	ATCL501222	5000		80R	40	40,000 Hr
	ATCL601222	6500		80R	40	40,000 Hr
	ATCL201223	2700		80R	40	40,000 Hr
	ATCL301223	3000		80R	40	40,000 Hr
	ATCL401223	4200		80R	40	40,000 Hr
	ATCL501223	5000		80R	40	40,000 Hr
	ATCL601223	6500		80R	40	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available

Colour temp of 2400K is also available on request.

Model No.	LED Color	System Power	Light output	CRI	IP	Lifespan
-----------	-----------	--------------	--------------	-----	----	----------



ATCL201241	2700			80R	60	40,000 Hr
ATCL301241	3000			80R	60	40,000 Hr
ATCL401241	4200			80R	60	40,000 Hr
ATCL501241	5000			80R	60	40,000 Hr
ATCL601241	6500			80R	60	40,000 Hr



ATCL201244	2700			80R	60	40,000 Hr
ATCL301244	3000			80R	60	40,000 Hr
ATCL401244	4200			80R	60	40,000 Hr
ATCL501244	5000			80R	60	40,000 Hr
ATCL601244	6500			80R	60	40,000 Hr



ATCL201245	2700			80R	60	40,000 Hr
ATCL301245	3000			80R	60	40,000 Hr
ATCL401245	4200			80R	60	40,000 Hr
ATCL501245	5000			80R	60	40,000 Hr
ATCL601245	6500			80R	60	40,000 Hr



FOUNTAIN LIGHT



Features : High intensity LED module. material of Aluminum Die casting former, larger cooling area and Better heat dissipation body. This technology makes point light sources, increasing the luminous surface, the translucent panel adopt polycarbonate material.

Applications : Offices, Conference rooms, Corridor staircase, Recreation area, Departmental store, Sport hall, Boutique and hospitals.



ATCL201256	2700			80R	65	40,000 Hr
ATCL301256	3000			80R	65	40,000 Hr
ATCL401256	4200			80R	65	40,000 Hr
ATCL501256	5000			80R	65	40,000 Hr
ATCL601256	6500			80R	65	40,000 Hr

Fixtures are also available in Triac and 0-10 V Dimming option.

For ordering :

'T' is refer after the Model No. for traic dimming .Eg. ATCL201153T.

'P' is refer after the Model No. for 0-10V dimming .Eg. ATCL201153P.

Standard fixture color are in white ,black and grey. Fixture color option are offered on request.

High CRI fixture also available

Colour temp of 2400K is also available on request.

